


DUAL SIDE BOX SUPPORT WALL BRACKET

Greatly reduces installation and material costs. One bracket does the work of two



PATENT PENDING

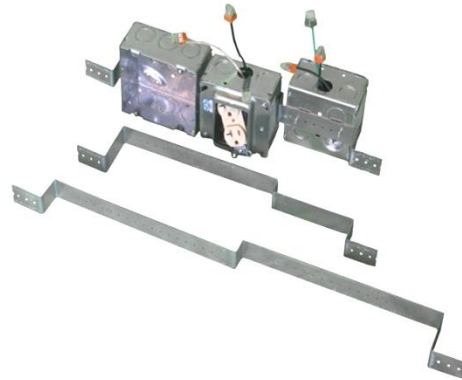

- Mount up to three 4" or 4-11/16" square deep boxes facing opposite directions in 16" and four boxes in 24" stud spacing. For shallow boxes use deeper mud ring.
- Built-in tabs for 3-1/2" and 6" wall depths provide extremely strong far side support for boxes.
- Stamped ruler on both sides and continuous 3/32" pilot holes, 1/4" on center, allow fast and accurate installation of boxes on bracket at specified locations.
- Wide wings with three 1/4" pilot holes on each side to mount to studs allows bracket to be moved up to 1/2" left or right to allow installation when studs are not exactly 16" and 24" on center.

CONDUIT SUPPORTS



MOUNTING BOXES BACK TO BACK VERTICALLY

for bedroom wall switches, bathroom switches with thermostats, etc. Center line of elevation of boxes from floor on each side of wall are at least approximately 4" apart.

- Continuous slots above and below 3/32" pilot holes. To mount boxes, allow ground screw clearance for all manufacturers brand of boxes.

Also available with any configuration UL listed prefabricated assemblies installed.



CATALOG NO.	DESCRIPTION	WEIGHT EACH	STANDARD PACKAGE
DSWB-16	Strong galvanized steel for 16" stud spacing	9 OZ.	25
DSWB-24	Strong galvanized steel for 24" stud spacing	13 OZ.	25

We look forward to hearing from you soon and promise to supply excellent quality and service

SP PRODUCTS, INC.
Productivity and Value thru Ideas
 1-800-233-8595 info@spproducts.com



Proud to be a NJATC training partner