


# EZ On/ Off Temporary Panel Covers

Provide a safe environment around live panels on new construction or remodeling sites

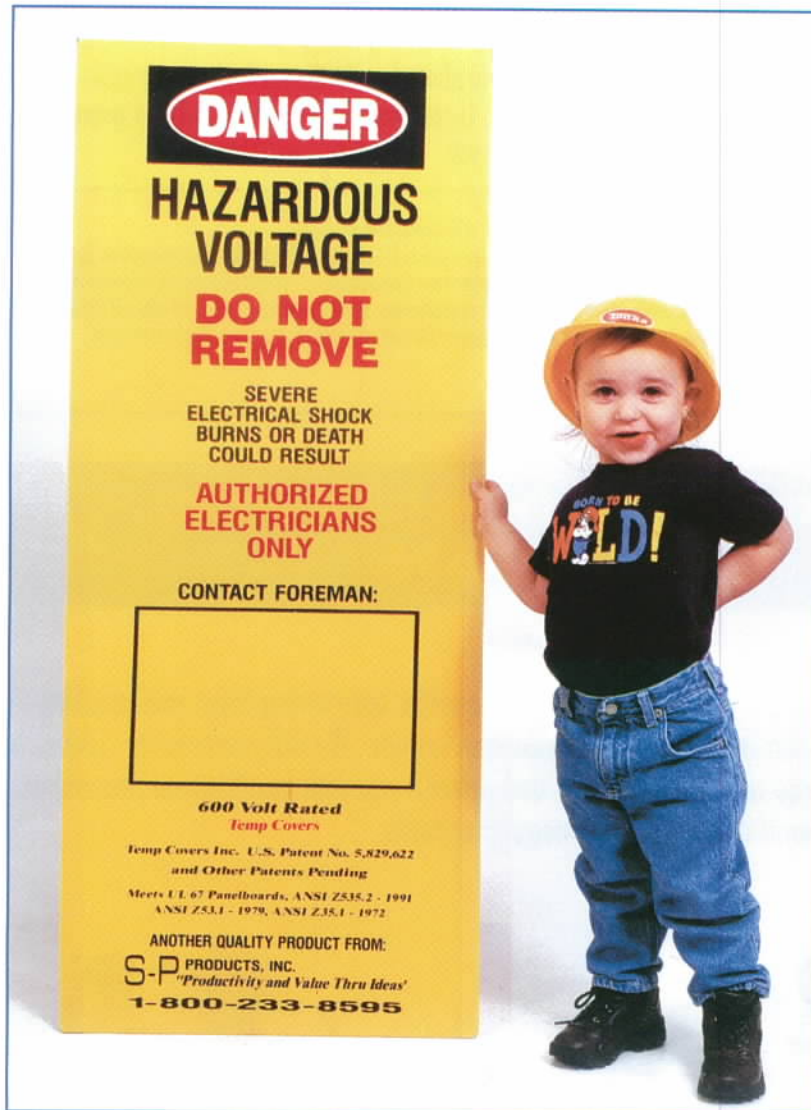

**Extremely safe**—600 volt rated cover provides a protective barrier for construction workers, visitors and tenants... electricians simply slip cover up or down when pulling wire to protect themselves from energized buss or terminations.

**Save time**—On and off in seconds. Cover is firmly held in place with strong, non-conductive magnetic strips. No more wasted time finding, cutting, taping and scribbling on cardboard or screwing covers on live panels several times a day.

**Durable**—Water resistant corrugated plastic will not puncture or tear easily. Covers are reusable with a long life.

**Meets UL67 Panelboards, ANSI Z535.2 -1991, ANSI Z53.1-1979, ANSI Z35.1-1972.**


U.S. Patent No. 5,829,622

U.S. Patent No. 6,076,696



Temporary Panelboard Ingress Barrier 10DX


info@sproducts.com

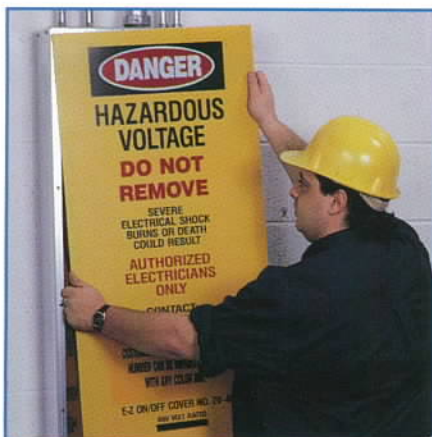

## Improve your image on the jobsite!

E-Z On/Off Covers are highly visible for maximum safety.

Personalizing each panel with your company name, logo and telephone number keeps your name highly visible to everyone, in a favorable way.

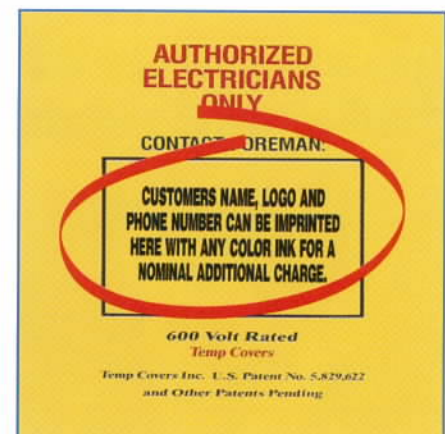



## Temporary Panelboard Ingress Barrier

10DX

### TempCovers Are:

Provided for protection from incidental contact only.

Temporary use only.

Indoor use only.

TempCovers are not intended for Temporary Electrical Power and Lighting Installations as covered in National Electrical Code (NEC) Article 527.

---

### UL Classified Instruction for use.

The responsibility of the End User is as follows:

1. TempCovers are intended to be field installed over the electrical access opening of indoor electrical lighting and/or appliance branch and power circuit panelboard enclosures, or the like, on a temporary basis during intermissions in the process of wiring the internal components of the aforementioned devices by qualified and/or license persons.
2. TempCovers are not to overlap panel tub more than 1/2" top, bottom and sides.
3. TempCovers shall be trimmed to the size of panel indicated by dashed line to insure no more than 1/2" overlap top or bottom. The solid black line indicates the minimum size that TempCovers can be trimmed to.
4. Custom TempCovers cannot be trimmed.
5. TempCovers shall cover entire panel tub in one piece. There shall be no joining together of temporary panel covers by any means.
6. Custom TempCovers cannot be trimmed.

---

### Recommended Instruction for use.

1. Insure Temporary Panel Cover is clean, free from rips, tears, bends or folds and magnets are intact. Replace immediately if any above conditions exist.
2. tempCovers are intended to be used only for a period of a work shift or consecutive multiple work shift that are manned by a qualified and/or license persons.
3. Qualified person and/or persons shall be properly trained as per all applicable OSHA Standards and NFPA 70E.
4. TempCovers Inc. assumes no responsibility or liability for improper training or use by the end user or end users employer.
5. TempCovers and Temporary Panel Cover are synonymous.