


“QWIK DUCT” HDPE TEMPLATE – ANY CONFIGURATION

For Duct Banks , Utility Transformers And Switchgear Stub Ups Extremely Safer And More Than 10 Times Faster Installation



- Strong high quality non-corrosive in sand , gravel , dirt or concrete . 3/8” thick UV stable BA50-100 HDPE material. Thicker sizes up to 2” available.
- Available in black recycled material or white non recycled for greater resistance to heat.
- One piece construction eliminates labor intensive individual spacers and chairs that often collapse during installation and require tie wire. Also no extra pieces to order, stock, handle or loose.
- Made in any combination of conduit sizes and configurations specified. Customer furnishes approved

drawings for each configuration.

- Trench can be opened or closed in a much shorter period of time.
- No workers, much less costly in the trench allows a narrower excavation with complete safety.
- Templates earn lead credits.



In a recent job a contractor did an extremely fast and safe installation



1. He loaded Ten 6” Schedule 40 Pvc Conduits into the templates in 40 foot long sections at his shop and hauled them to the site on flat bed trucks and closely lined them up onto the trench bank.
2. Then glued them together into one 380 foot long section...
- 3... And lowered in one piece into the trench with 2 back hoes.

No workers were in the trench except for 2 at each manhole for a short period of time allowing him to dig a much safer narrower and less costly trench.



He bid the job at \$1.9 million and delivered it at \$1.1 million dollars!!!!

SP PRODUCTS, INC.
Productivity and Value thru Ideas

730 Pratt Boulevard | Elk Grove Village, IL 60007
Phone: 800-233-8595
www.spproducts.com | info@spproducts.com




Proud to be a NJATC Training Partner

"Qwik Duct" Template

Templates are ideal for a wide variety of jobs—airports, water and power plants, hospitals, stadiums, and all types of other commercial and industrial projects.

- Hole sizes and spacing can be made to order. Hole sizes are 1" wider, or more if specified, than diameter of conduit for ease of inserting bell ends, lining up sections of conduits in the trench, and concrete flow thru.
- 1-1/8" diameter rebar holes in each corner are standard. Additional openings for rebar, concrete flow through or combination of each can be furnished per customers specifications.
- Manufacturers safety data sheets available.

Example: QDT-A-2X2-4

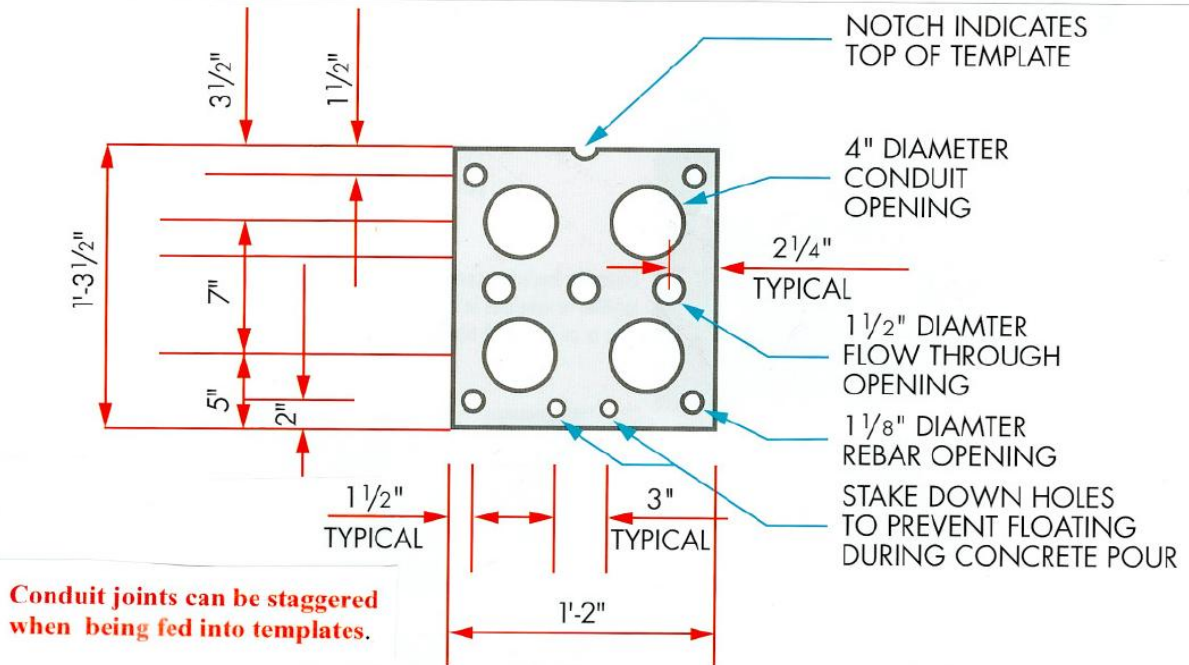

When placing your order S-P Products must receive complete and accurate signed and dated approval drawings from the customer and ALL OTHER PARTIES INVOLVED before a non-cancelable order is accepted, material is ordered, and production begins. Once the material is ordered, the customer is immediately responsible for the material plus any and all labor costs incurred by S-P Products. If the customer makes any changes after he places his order, he is also responsible for all labor and material costs incurred by S-P Products.

- To place an order, or request samples and our full line catalog showing the many other high quality, competitively priced, UL listed products we offer that lower labor costs, reduce waste, and make your jobs safer, contact our distributor or representative in your area or call S-P Products.

Please call us soon. In addition to saving our customers a great deal of money, we promise excellent quality, service, and on-time delivery, 24 hours per day, 365 days per year.

SP PRODUCTS, INC.
Productivity and Value thru Ideas

730 Pratt Boulevard | Elk Grove Village, IL 60007
Phone: 800-233-8595
www.spproducts.com | info@spproducts.com



Proud to be a NJATC Training Partner