

Transition Couplings



PVC Schedule 40 & 80

to Rigid Conduit When Exiting Concrete Slab

Save
at Least
1 Hour per
Installation.



Transitions in Less Than 5 Minutes!

Save Cost on the Rigid Nipple, Tape & Labor

Use for Entire Job - Not Just for Repair







UL US
LISTED
PATENTED

1/2" thru 6"

Transition Couplings	
Size	PVC/RGD
1/2"	50PVC/RGD
3/4"	75PVC/RGD
1"	100PVC/RGD
1 1/4"	125PVC/RGD
1 1/2"	150PVC/RGD
2"	200PVC/RGD
2 1/2"	250PVC/RGD
3"	300PVC/RGD
3 1/2"	350PVC/RGD
4"	400PVC/RGD
5"	500PVC/RGD
6"	600PVC/RGD

All Above Meet UL651
CSA C22.2, No.85 and
US Army Corps Engineers
Specifications

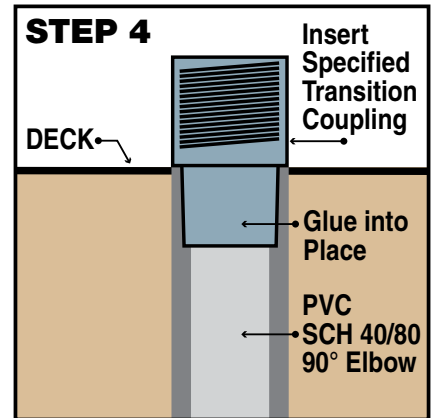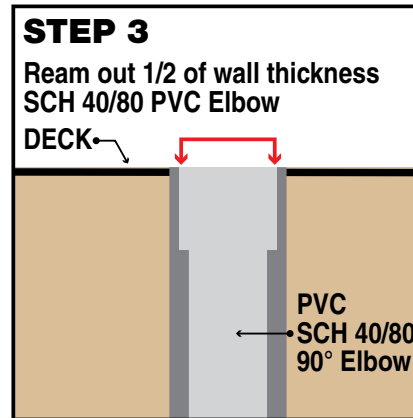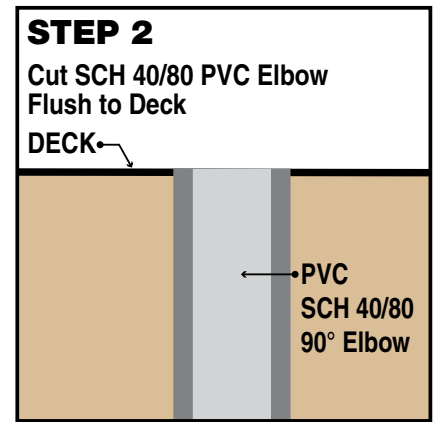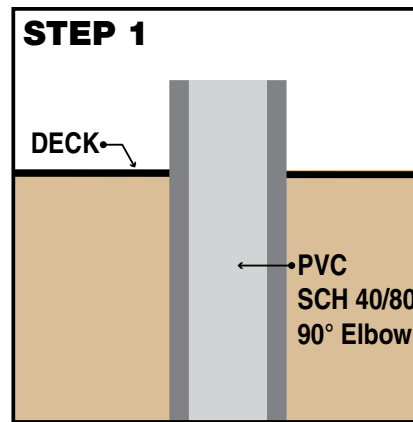

All SP Products Inc.
Transition Fittings are
manufactured for
installation to either
meet or exceed
in accordance with
NEMA TC2, TC3 or
UL 651 specifications

Customer must satisfy all codes and owners' specifications.



PATENT PENDING
PATENTED



LABELS APPLY TO PRODUCTS ONLY WHERE SHOWN ABOVE

730 Pratt Boulevard • Elk Grove Village, IL 60007

P: (847) 593-8595 • F: (847) 593-8629 • Toll-free (800) 233-8595

E: info@spproducts.com • www.spproducts.com

IP13c